

# Shop:- Wood & Woodworking


**Tool Use:-** Wooden Saw, Jack Plane, Farming Chisel, Hammer, Measuring Tape, , Try Square, Marking Gauge, Carpentry Vice, Raps File, Etc.

- 1) Wooden Saw                    :- Use For Wood Cutting
- 2) Jack Plane                    :- Use For Wood Planning
- 3) Farming Chisel                :- Use For Farming
- 4) Hammer                        :- Use For Striking
- 5) Measuring Tape                :- Use For Measuring
- 6) Try Square                      :- Use For Angle Checking & Marking
- 7) Marking Gauge                :- Use For Marking
- 8) Carpentry Vice                :- Use For Job Holding
- 9) Raps File                        :- Use For Filing
- 10) Wood Turning m/c.        :- Use for Wood Turning

## MARKING AND MEASURING TOOLS


### 1 Steel rule and Steel tape

Steel rule is a simple measuring instrument consisting of a long, thin metal strip with a marked scale of unit divisions. It is an important tool for linear measurement. *Steel tape* is used for large measurements, such as marking on boards and checking the overall dimensions of the work.

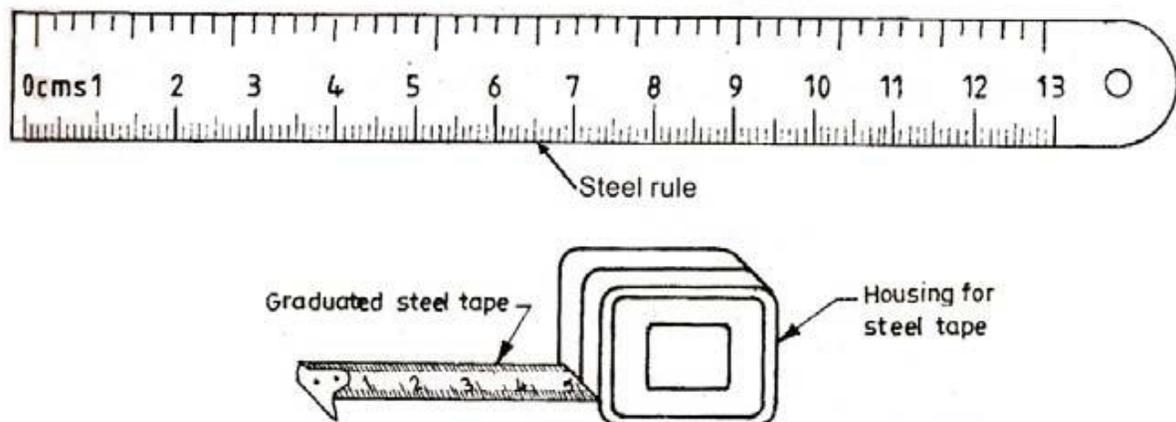

## 2 Marking gauge


It is a tool used to mark lines parallel to the edge of a wooden piece. It consists of a square wooden stem with a sliding wooden stock (head) on it. On the stem is fitted a marking pin, made of steel. The stock is set at any desired distance from the marking point and fixed in position by a screw. It must be ensured that the marking pin projects through the stem, about 3 mm and the end are sharp enough to make a very fine line. A *mortise gauge* consists of two pins. In this, it is possible to adjust the distance between the pins, to draw two parallel lines on the stock. a. Marking gauge b. Mortise gauge

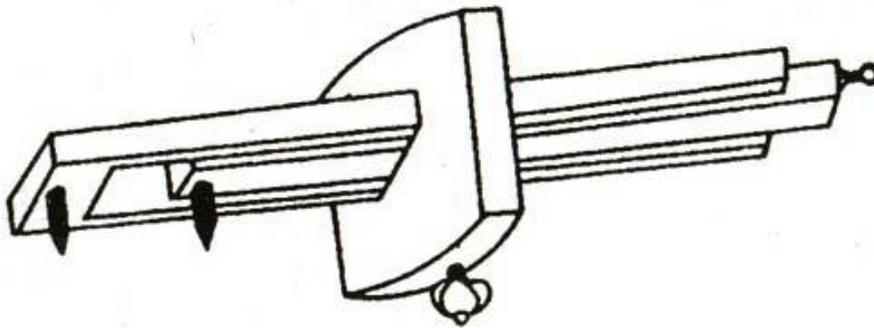

b. Mortise gauge

## 3 Try-square

It is used for marking and testing the squareness and straightness of planed surfaces. It consists of a steel blade, fitted in a cast iron stock. It is also used for checking the planed surfaces for flatness. Its size varies from 150 to 300 mm, according to the length of the blade. It is less accurate when compared to the try-square used in the fitting shop.

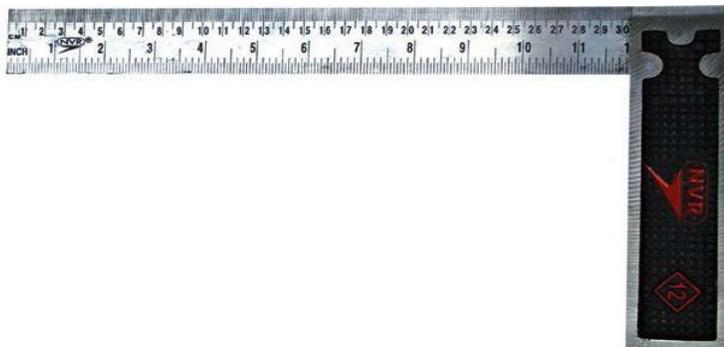

## 4 Compass and divider


Compass and divider, are used for marking arcs and circles on the planed surfaces of the wood.

## 5 Scriber or marking knife

It is used for marking on timber. It is made of steel having one end pointed and the other end formed into a sharp cutting edge.

## 6 Bevel

It is used for laying-out and checking angles. The blade of the bevel is adjustable and may be held in place by a thumb screw. After it is set to the desired angle, it can be used in much the same way as a try-square. A good way to set it to the required angle is to mark the angle on a surface and then adjust the blade to fit the angle.

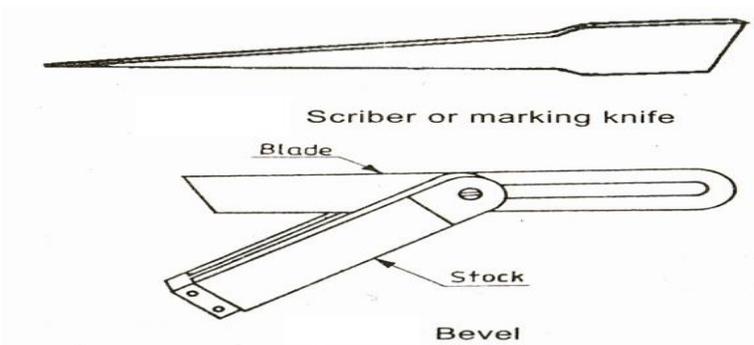

**Scriber or marking knife**

## HOLDING TOOLS

### 1 Carpenter's vice

Figure 2.6 shows the carpenter's bench vice, used as a work holding device in a carpenter shop. Its one jaw is fixed to the side of the table while the other is movable by means of a screw and a handle. The Carpenter's vice jaws are lined with hard wooden faces.

## PLANING TOOLS

### 1 Jack plane

It is the most commonly used general purpose plane. It is about 35 cm long. The cutting iron (blade) should have a cutting edge of slight curvature. It is used for quick removal of material on rough work and is also used in oblique planing.

### 2 Smoothing plane

It is used for finishing work and hence, the blade should have a straight cutting edge. It is about 20 to 25 cm long. Being short, it can follow even the slight depressions in the stock, better than the jack plane. It is used after using the jack plane.

### 3 Rebate plane

It is used for making a rebate. A rebate is a recess along the edge of a piece of wood, which is generally used for positioning glass in frames and doors.

### 4 Plough plane

It is used to cut grooves, which are used to fix panels in a door. Figure 2.9 shows the various types of planes mentioned above.

## CUTTING TOOLS

### 1 Saws

A saw is used to cut wood into pieces. There are different types of saws, designed to suit different purposes. A saw is specified by the length of its toothed edge.

#### 1 Cross-cut or hand saw

It is used to cut across the grains of the stock. The teeth are so set that the saw kerf will be wider than the blade thickness. This allows the blade to move freely in the cut, without sticking.

#### 2 Rip saw


It is used for cutting the stock along the grains. The cutting edge of this saw makes a steeper angle, i.e., about  $60^\circ$  whereas that of crosscut saw makes an angle of  $45^\circ$  with the surface of the stock.

#### 3 Tenon saw


It is used for cutting the stock either along or across the grains. It is used for cutting tenons and in fine cabinet work. However, it is used for small and thin cuts. The blade of this saw is very thin and so it is stiffened with a thick back steel strip. Hence, this is sometimes called as back-saw. In this, the teeth are shaped like those of cross-cut saw.

#### 4 Compass saw

It has a narrow, longer and stronger tapering blade, which is used for heavy works (Fig. 1.13). It is mostly used in radius cutting. The blade of this saw is fitted with an open type wooden handle.

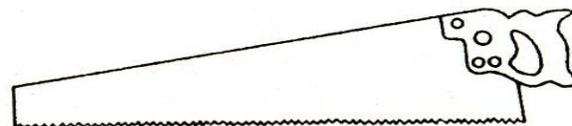

a - Cross cut saw



b - Cross cut saw teeth




c - Rip saw teeth

Cross-cut and rip saw

## Chisel

Chisels are used for cutting and shaping wood accurately. Wood chisels are made in various blade widths, ranging from 3 to 50 mm. They are also made in different blade lengths. Most of the wood chisels are made into tang type, having a steel

shank which fits inside the handle. These are made of forged steel or tool steel blades.

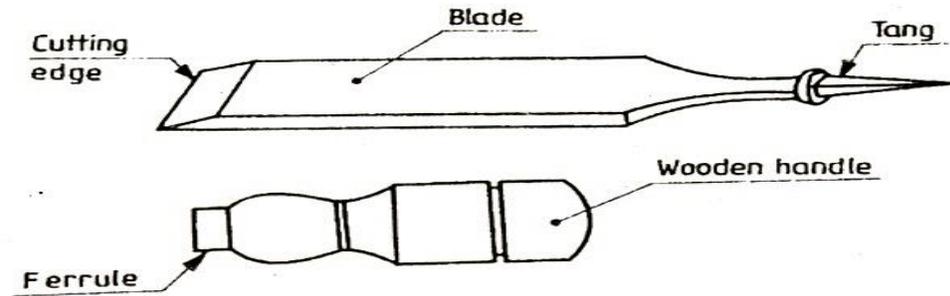

### 1 Firmer chisel


The word 'firmer' means 'stronger' and hence firmer chisel is stronger than other chisels. It is a general purpose chisel and is used either by hand pressure or by a mallet. The blade of a firmer chisel is flat, as shown in Figure 2.12 a.

### 2 Dovetail chisel

It has a blade with a beveled back, as shown in Figure, due to which it can enter sharp corners for finishing, as in dovetail joints.

### 3 Mortise chisel

It is used for cutting mortises and chipping inside holes, etc. The cross-section of the mortise chisel is proportioned to withstand heavy blows during mortising. Further, the cross-section is made stronger near the shank.

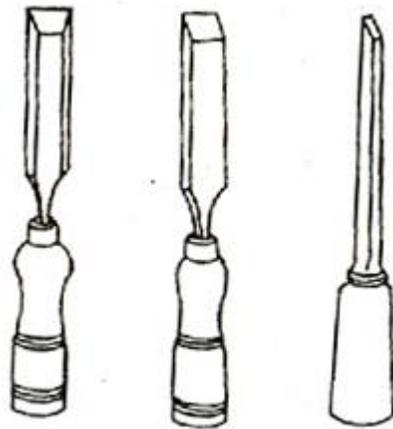

a. Firmer      b. Dovetail      c. Mortise

## DRILLING AND BORING TOOLS

### 1 Carpenter's brace

It is used for rotating auger bits, twist drills, etc., to produce holes in wood. In some designs, braces are made with ratchet device. With this, holes may be made in a corner where complete revolution of the handle cannot be made. The size of a brace is determined by its sweep.

### 2 Auger bit

It is the most common tool used for making holes in wood. During drilling, the lead screw of the bit guides into the wood, necessitating only moderate pressure on the brace. The helical flutes on the surface carry the chips to the outer surface.

### 3 Hand drill

Carpenter's brace is used to make relatively large size holes; whereas hand drill is used for drilling small holes. A straight shank drill is used with this tool. It is small, light in weight and may be conveniently used than the brace. The drill bit is clamped in the chuck at its end and is rotated by a handle attached to gear and pinion arrangement.

### 4 Gimlet

It has cutting edges like a twist drill. It is used for drilling large diameter holes with the hand pressure.



## MISCELLANEOUS TOOLS

### 1 Mallet


It is used to drive the chisel, when considerable force is to be applied, which may be the case in making deep rough cuts. Steel hammer should not be used for the purpose, as it may damage the chisel handle. Further, for better control, it is better to apply a series of light taps with the mallet rather than a heavy single blow.

### 2 Pincer

It is made of two forged steel arms with a hinged joint and is used for pulling-out small nails from wood. The inner faces of the pincer jaws are beveled and the outer faces are plain. The end of one arm has a ball and the other has a claw. The beveled jaws and the claw are used for pulling out small nails, pins and screws from the wood.

### 3 Claw hammer

It has a striking flat face at one end and the claw at the other, as shown in figure. The face is used to drive nails into wood and for other striking purposes and the claw for extracting relatively large nails out of wood. It is made of cast steel and weighs from 0.25 kg to 0.75 kg.

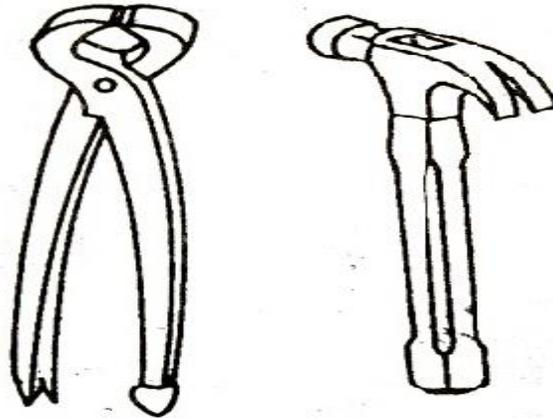


#### **4 Screw driver**

It is used for driving screws into wood or unscrewing them. The screw driver of a carpenter is different from the other common types, as shown in figure.


The length of a screw driver is determined by the length of the blade. As the length of the blade increases, the width and thickness of the tip also increase.

#### **5 Wood rasp file**

It is a finishing tool used to make the wood surface smooth, remove sharp edges, finish fillets and other interior surfaces. Sharp cutting teeth are provided on its surface for the purpose. This file is exclusively used in wood work.



**Wood rasp file**

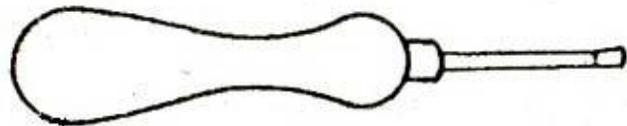

**Screw driver**

#### **6 Bradawl**

It is a hand operated tool, used to bore small holes for starting a screw or large nail.